

Technical information - Fitting standard panels






Aquamura panels have an attractive, tough laminate surface, and are constructed from quality water resistant plywood.

For best results with Aquamura panels, start in corner and finish


over doorway.




Glue down edge of panel and fix into corner profile.





Screw down length of grooved panel. Use appropriate plugs for concrete, brick or plaster.





Apply sealant in joint before fitting Slide the panel into place. next panel.





Cut last panel of each wall to size. Mark position of final piece sym-Glue edge, fit profile and swing into metrically over doorway. Cut panels and fix. Glue and screw where heads will be hidden by door moulding or coving.

Accessories





Shower panels should be trimmed to the correct height and width and then installed resting on the shower tray, embedded in silicon.

Panels can be glued back to wall battens or glued directly onto a suitable wall. Aluminium internal corner jointers and end caps are recommended, with silicon applied into the extrusion.





Features

A design-led selection of Continental laminate finishes Easy to install - no wet trades Cost-effective Hard-wearing Easily cleaned and maintained

Applications

Aquamura has been successfully installed in all of the following locations:

Bathrooms
Fast food restaurants
Gymnasiums and Health Clubs
Pubs, Clubs and Bars
Hospitals and Health Centres
Shower cubicles
Heavy-traffic corridors

Specification

Core material Face material Reverse

Schools Retail areas Leisure Centres Kitchens

Doctors' surgeries

Changing rooms

Reception areas

Birch plywood High pressure decorative laminate Balancing laminate

Dimensions

Standard panel size 2400 x 590 x 11mm T&G 12kg Shower panel size 2400 x 1200 x 11mm square cut 24kg Shower panel special 2400 x 1200 x 11 mm T&G 24kg

Aluminium jointing sections are available in 2500mm lengths in a variety of finishes: S.A.A., polished aluminium, black and white.

Fire Performance

Aquamura complies with Class II surface spread of flame.

Cleaning and Maintenance

Wipe with a non-abrasive damp cloth and a mild spray detergent.

Warranty

Aquamura is guaranteed for 10 years if correctly fitted, thoroughly sealed and maintained.

Note: The colours reproduced in this brochure are as close as possible to the actual laminates. It is recommended that you obtain samples prior to final specification.

What is Aquamura?

Aquamura is a wall panelling system, made from WBP Birch plywood faced in a high-pressure decorative laminate. It is a simple, attractive and economical way to transform walls.

In a complete room installation, the tongued and grooved laminate-faced panels fit together quickly and effortlessly. The fixings are completely hidden.

Within a shower enclosure, full size boards clad each wall, minimising joints, for a hygienic solution, and no mouldy grout!






Distributed by



wall panelling

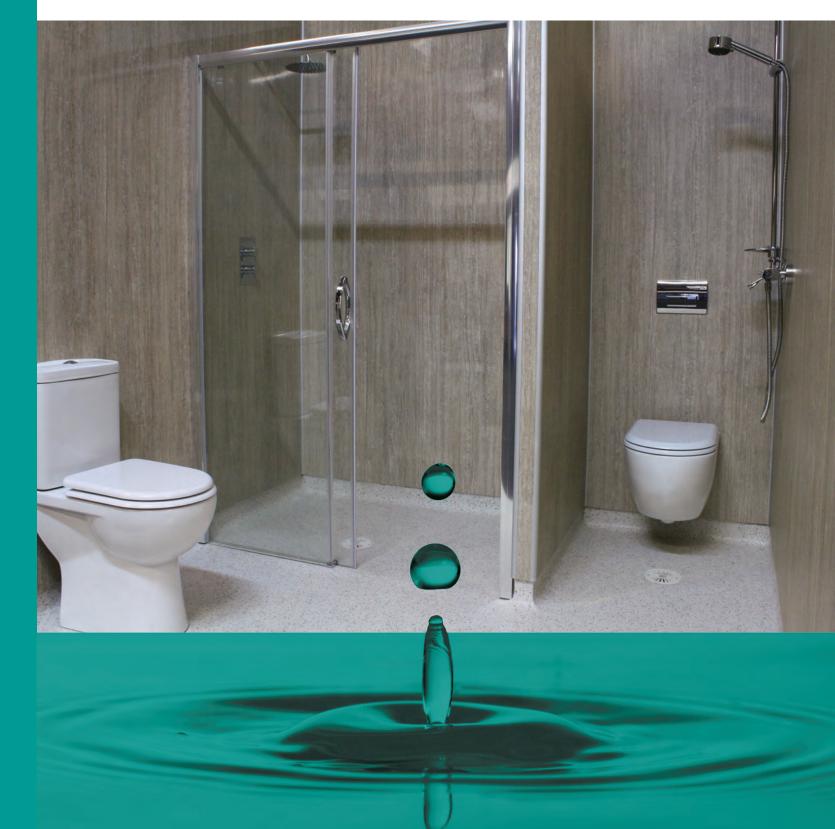


ollection

000






cllection

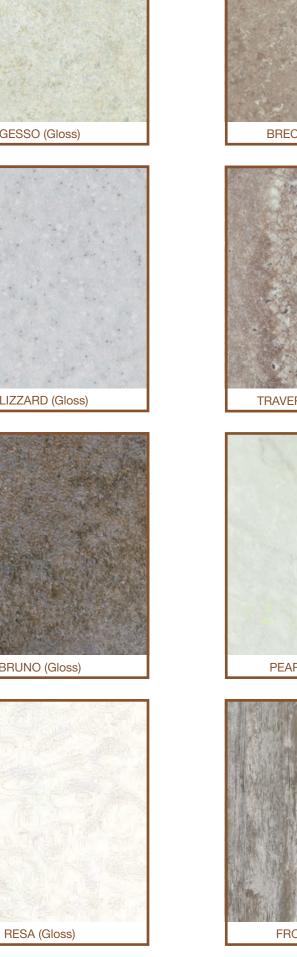





FROSTWOOD (Gloss)

DOLOMITE (Gloss)







LATTE SLATE (Slate)



CARRERA (Gloss) LARGE SCALE





CAPPUCCINO SLATE (Slate)









TRAVERTINE STONE (Stone)





SUNRISE (Gloss)



LUNA STONE (Stone)

